



# 140W HIGH BAY FIXTURE


## INSTALLATION INSTRUCTION HIGH BAY FIXTURE LSG0630XX

### SAFETY INSTRUCTION

IMPORTANT: NEVER attempt any work without turning off the electricity.

- Please read all instructions before installation.
- Intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main electrical panel. Place the main power switch in the "OFF" position switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.

**Figure 1**

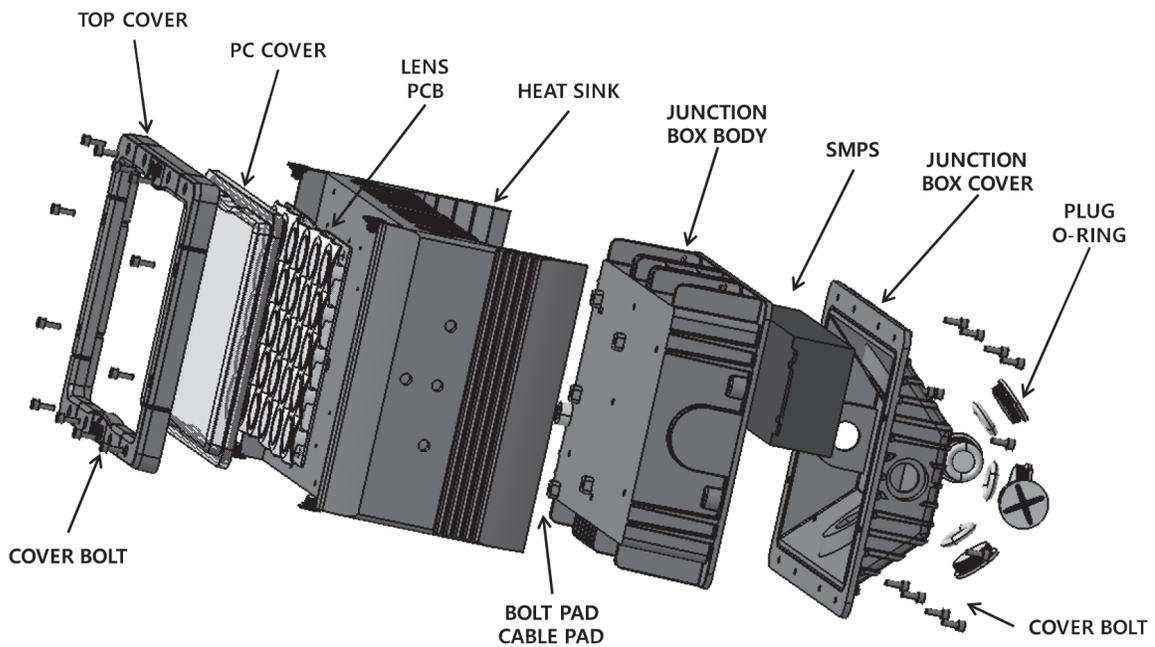

### WIRING AND INSTALLATION

1. Remove Junction Box cover screws (see Figure 1).
2. Separate the Cover from junction box rear of housing.
3. Remove desired  $\frac{3}{4}$ " hole and insert desired wire and gland.
4. Connect ACL, ACN and Earth Ground using provided connectors.
5. Replace Junction Box Cover.
6. Replace Junction Box Cover screws.